


PART NO. FT-C001-D100001  
 CUST NO. 32004-001000-100-RS

# CUSTOMER DRAWING


REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

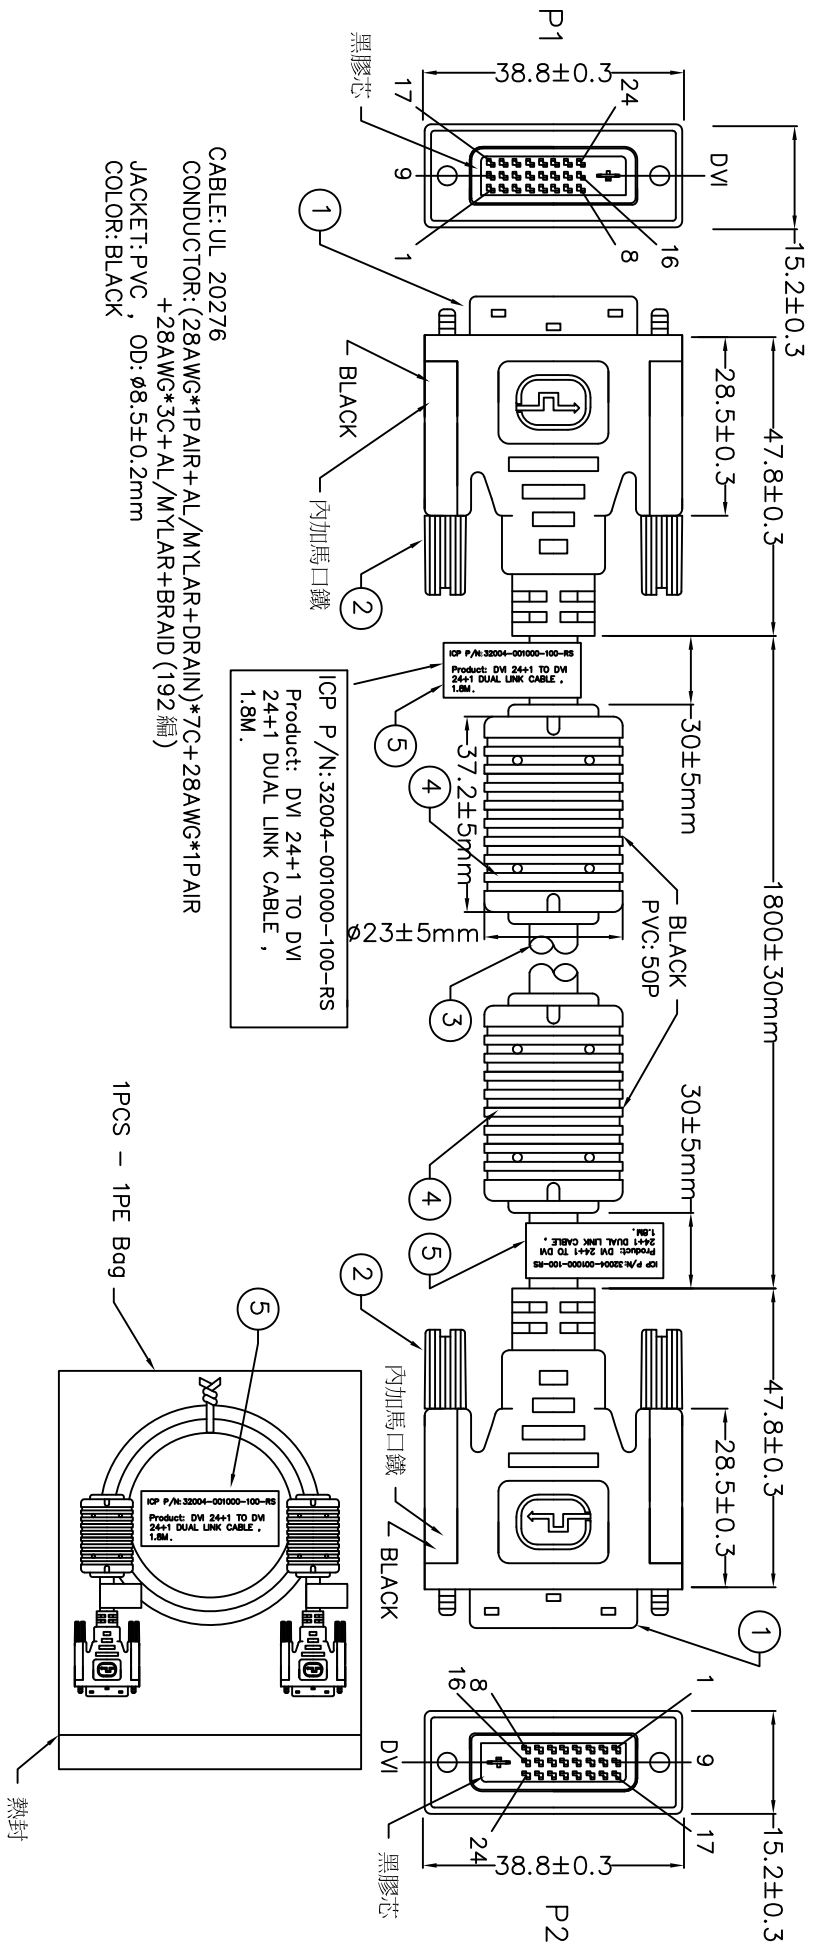

CABLE: UL 20276  
 CONDUCTOR: (28AWG\*1PAIR+AL/MYLAR+DRAIN)\*7C+28AWG\*1PAIR  
 +28AWG\*3C+AL/MYLAR+BRAID (192 編)  
 JACKET: PVC, OD:  $\phi 8.5 \pm 0.2$ mm  
 COLOR: BLACK

### PIN ASSIGNMENT

WIRE	P1	P2	WIRE	P1	P2	WIRE	P1	P2	NOTE	DESCRIPTION
1	1 (28AWG)	1	17 (28AWG)	17	10	7 (28AWG)	7	1	DVI M/24+1PIN (MALE) 組裝式 * 2PCS	
2	2 (28AWG)	2	18 (28AWG)	18	11	16 (28AWG)	16	2	#4-40 UNC SCREW * 4PCS	
3	3 (DRAIN WIRE)	3	19 (DRAIN WIRE)	19		SHELLBRAID	SHELL	3	UL 20276 $\phi 8.5$ mm CABLE	
4	3 (DRAIN WIRE)	3	19 (DRAIN WIRE)	19				4	CORE: $\phi 17.5 * \phi 9.5 * 28.5$ mm * 2pcs	
5	4 (28AWG)	4	20 (28AWG)	20				5	"LABEL" * 3PCS	防水標籤
9	5 (28AWG)	5	21 (28AWG)	21						
9	9 (28AWG)	9	22 (DRAIN WIRE)	22						
10	10 (28AWG)	10	23 (28AWG)	23						
11	11 (DRAIN WIRE)	11	24 (28AWG)	24						
11	11 (DRAIN WIRE)	11	14 (28AWG)	14						
12	12 (28AWG)	12	15 (28AWG)	15						
13	13 (28AWG)	13	6 (28AWG)	6						

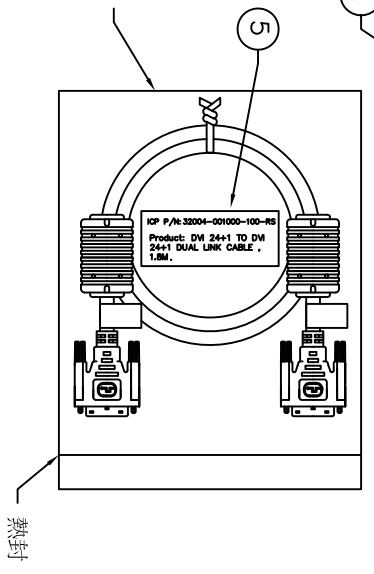

International Units: MILLIMETERS  
 TOLERANCES ARE:  
 DECIMALS ANGLES  
 .XX .020 .5°  
 DIMENSION IN BRACKET (X.XX)  
 ARE INCHES TOLERANCES ARE:  
 .XX .020 .5°

APPROVALS  
 DRAWN: Chunhua Yan  
 CHECKED: Hallong Zhang  
 APPROVAL: Shan Huang  
 DATE: 2011.02.25  
 DATE: 2011.02.25

**Futronic Technology**

DVI M/24+1 to 24+1+2 CORE, 1.8 M UL 20276  $\phi 8.5$ mm CABLE

SIZE: C  
 SCALE: xx : xx  
 DRAWING NO.: FT-C292-247  
 REV.: A

DO NOT SCALE DRAWING