


PART NO. FT-C001-D98015  
CUST NO.

# CUSTOMER DRAWING

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

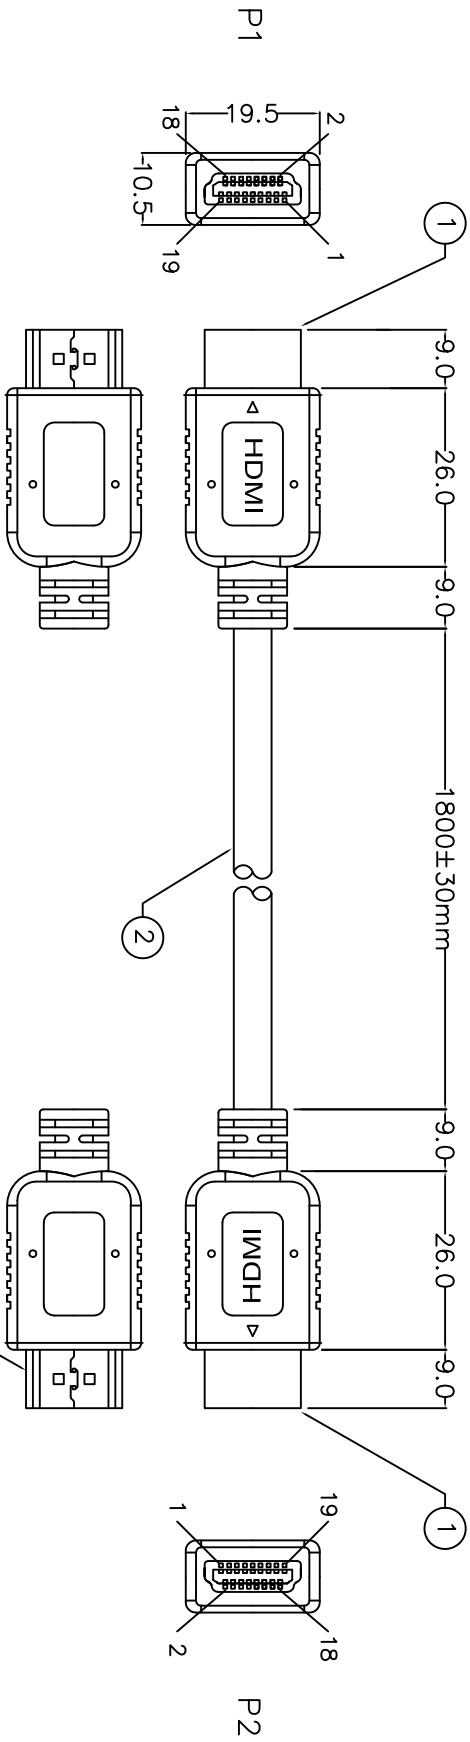

CABLE: UL20276  
CONDUCTOR: (1P\*28AWG+AL+D)\*4C+1P\*28AWG+28AWG\*5C+AL+B  
JACKET: PVC, OD:  $\phi 7.3 \pm 0.2$ mm  
COLOR: BLACK

## PIN ASSIGNMENT

WIRE	P1	P2	WIRE	P1	P2	NOTE	DESCRIPTION
1	(28AWG, RED)	1	4	11 (DRAIN WIRE)	11	1	HDMI 19PIN (MALE) CONNECTOR (PIN&Shell Gold Flash)
2	(DRAIN WIRE)	2	12 (28AWG, WHITE)	12	2	2	UL20276 $\phi 7.3$ mm CABLE
3	(28AWG, WHITE)	3	17 (28AWG, YELLOW)	17			
4	(28AWG, GREEN)	4	18 (28AWG, ORANGE)	18			
5	(DRAIN WIRE)	5	13 (28AWG, GRAY)	13			
6	(28AWG, WHITE)	6	14 (28AWG, PURPLE)	14			
7	(28AWG, BLUE)	7	8 (28AWG, RED)	15			
8	(DRAIN WIRE)	8	9 (28AWG, WHITE)	16			
9	(28AWG, WHITE)	9	10 (28AWG, PINK)	19			
4	10 (28AWG, BROWN)	10	11 (SHELL, BRAID)	19			SHELL

內模: 馬口鐵  
外模: PVC 50P, BLACK

PIN針&外殼:鍍金

A

B

C

D

A

B

C

D

INTERNATIONAL UNITS DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLES .XX ± .020 13° .XXX ± .030 DIMENSION IN BRACKET [X.XX] ARE INCHES TOLERANCES ARE: DECIMALS ANGLES .XXX .XXX		APPROVALS DRAWN: Chunhua Yan CHECKED: Hallong Zhang APPROVAL: Shan, Huang	DATE 2009.09.02 2009.09.02		SIZE C XX : XX	DRAWING NO. FT - C292 - 059	REV. A
DO NOT SCALE DRAWING		ID NO.	SHEET 1 OF 1				

4

3

2

1