


PART NO. FT-C008-U99006
 CUST NO.


CUSTOMER DRAWING

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

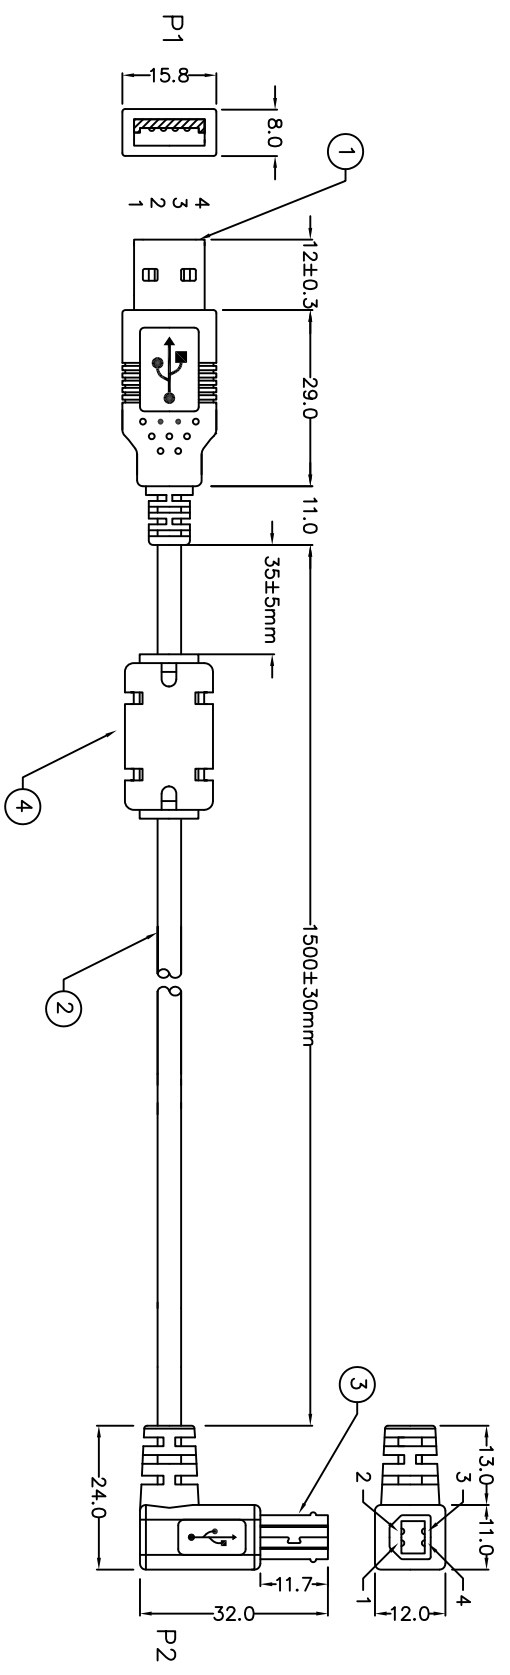

CABLE: UL 2725 USB 2.0 Version
 CONDUCTOR: (28AWG*1PAIR)+28AWG*2C+AL/MLAR+DRAIN WIRE+BRAID, Braid: 64 Mg/AL.
 JACKET: PVC, OD: ϕ 3.8±0.1mm
 COLOR: BLACK

WIRING DIAGRAM

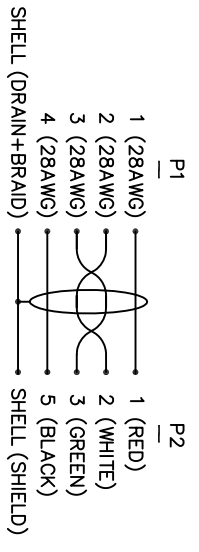

NOTE	DESCRIPTION
1	USB A-TYPE (MALE), PIN: GOLD FLASH
2	UL 2725 (28AWG*1P)+28AWG*2C+A+D+B CABLE
3	USB B-TYPE (MALE), PIN: GOLD FLASH (90°)
4	CORE

A

B

C

D

4

3

2

1

DIMENSION AND TOLERANCES		APPROVALS		DATE	
TOLERANCES ARE:	REGULARS	DRAWN	DATE		
XX.X	ANGLES	Chunhua Yan	2011/07/01		
XX.X	2R	CHECKED			
XX	DIMENSION IN BRACKET (X.X)/AVE	Hailong Zhang	2011/07/01		
XX	MOST TOLERANCES ARE:	APPROVAL			
	DECIMALS	Shan Huang	2011/07/01		
	ANGLES				
	DO NOT SCALE DRAWING				

A

B

C

D

Futronic Technology

USB A/B(90°)-TYPE(M), 1.5M UL 2725 2.0 Version ϕ 3.8mm CABLE

SIZE SCALE: XX:XX DRAWING NO. REV. A

ID NO. SHEET 1 OF 1