


PART NO. FT-C015-M108882
 CUST NO. 70050395000

CUSTOMER DRAWING

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

RoHS

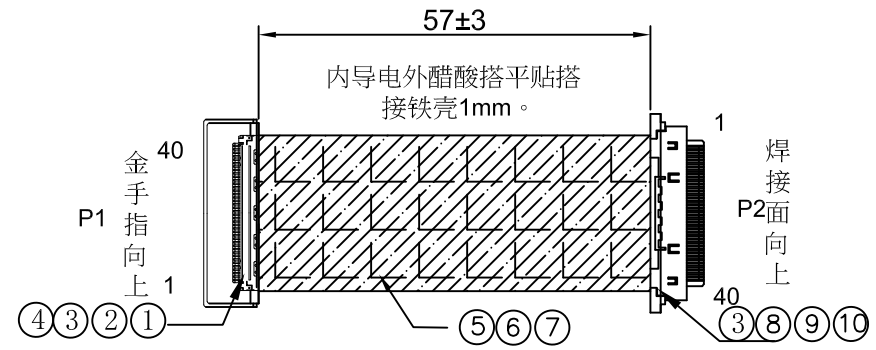

WIRING DIAGRAM

	NC	绿	绿	绿	绿	NC	NC	绿	绿	绿	绿	绿	绿	绿	绿	绿	绿	绿	绿	绿	白	蓝	绿	白	蓝	绿	白	蓝	绿	NC	NC	NC	NC	NC	NC	NC	NC			
P1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
P2		39	38	37	36			33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8							

双绞 双绞 双绞

- 测试要求:
- 100%进行短/断路测试。
 - 导通阻抗: 3 Ω
 - 绝缘阻抗: 5 M Ω
 - DC高压: 200V
 - 高压时间: 0.1s
 - 耐压AC: 200V 时间: 0.02S
 - 漏电电流: 0.5mA

10	高温胶带	20.5*0.06*5mm	1	
9	铁壳	20410-0铁壳	1	
8	连接器	20410-040 0.5间距	1	
7	导电布	59MM*20MM	2	
6	醋酸布	60MM*22MM	2	
5	线材	10064 #32 AWG	2M	
4	高温胶带	20.5*0.06*1.5MM	1	
3	UV 胶	UV106	适量	
2	铁壳	20454-040铁壳带拉环	1	
1	连接器	20454-040 (仿 IPEX) 0.5间距带拉环	1	
序号	品名	规格描述	数量	备注

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: XXXXX	APPROVALS	DATE				
	DRAWN PETER.YEH	2019.07.25				
	CHECKED SANDY.CHEN	2019.07.25	IPEX 40P TO ACES eDP COAXIAL CABLE			
	APPROVAL BRYAN.HO	2018.07.25	SIZE C	SCALE: XX : XX	DRAWING NO. FT-C292-704	REV. A
DIMENSIONS		TOLERANCE		ID NO.	SHEET 1 OF 1	
.X		±0.5				
X.		±1				
XX.		±10				
XXX.		±50				