



CUSTOMER DRAWING

REV. NO.	DESCRIPTION	DATE	APPROVED
LTR			

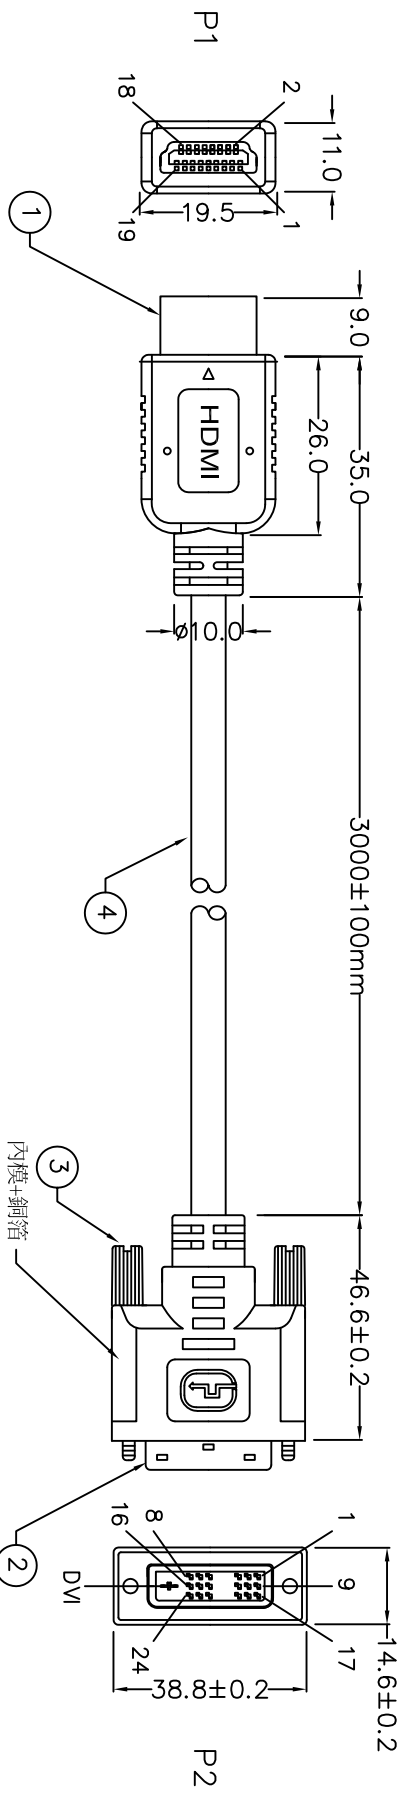


CABLE: UL 20276
CONDUCTOR: (30AWG*1PAIR+AL/MYLAR+DRAIN WIRE)*4C+(30AWG*1PAIR)
+30AWG*3C+AL/MYLAR+BRAID
JACKET: PVC, OD: ϕ 5.5±0.15mm
COLOR: BLACK

PIN ASSIGNMENT

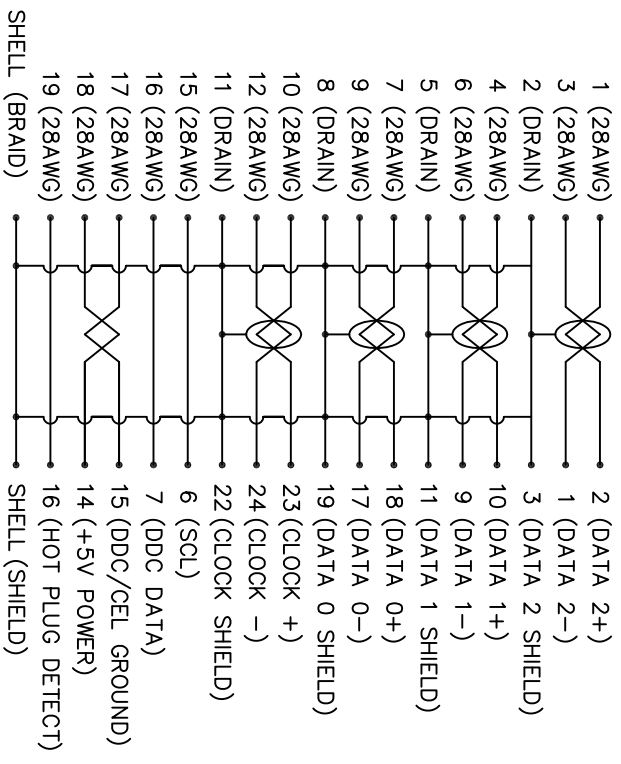

1PCS - 1PE BAG

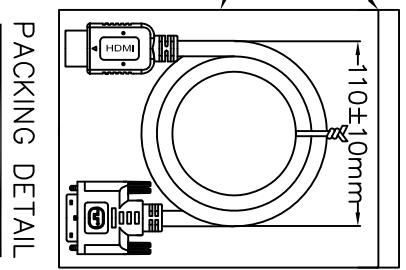

NOTE	DESCRIPTION
1	HDMI 19PIN (MALE), PIN: GOLD FLASH&SHELL: NICKEL PLATED (加馬口鐵)
2	DVI/M/18+1PIN (MALE), PIN: GOLD FLASH&SHELL: NICKEL PLATED (內模+銅箔)
3	#4-40 SCREW NUTS * 2PCS
4	UL 20276 (30AWG*1P+AD)*4C+(30AWG*1P)+30AWG*3C+AB CABLE

DIMENSION ARE MILLIMETERS TOLERANCES ARE:		APPROVALS		DATE	
DECIMALS	± 0.30	DRAWN	Terry Ho	2012/01/09	
ANGLES	X ± 0.50	CHECKED	James Wu	2012/01/09	
XX ± 0.30		APPROVAL	Bryan Ho	2012/01/09	
DO NOT SCALE DRAWING				SIZE: UL20276, L=3000MM SCALE: xx : xx DRAWING NO.: FT-C292-305 SHEET 1 OF 1	