


PART NO. FT-C027-D100109
CUST NO.

CUSTOMER DRAWING

REV. NO.	DESCRIPTION	DATE	APPROVED
1			

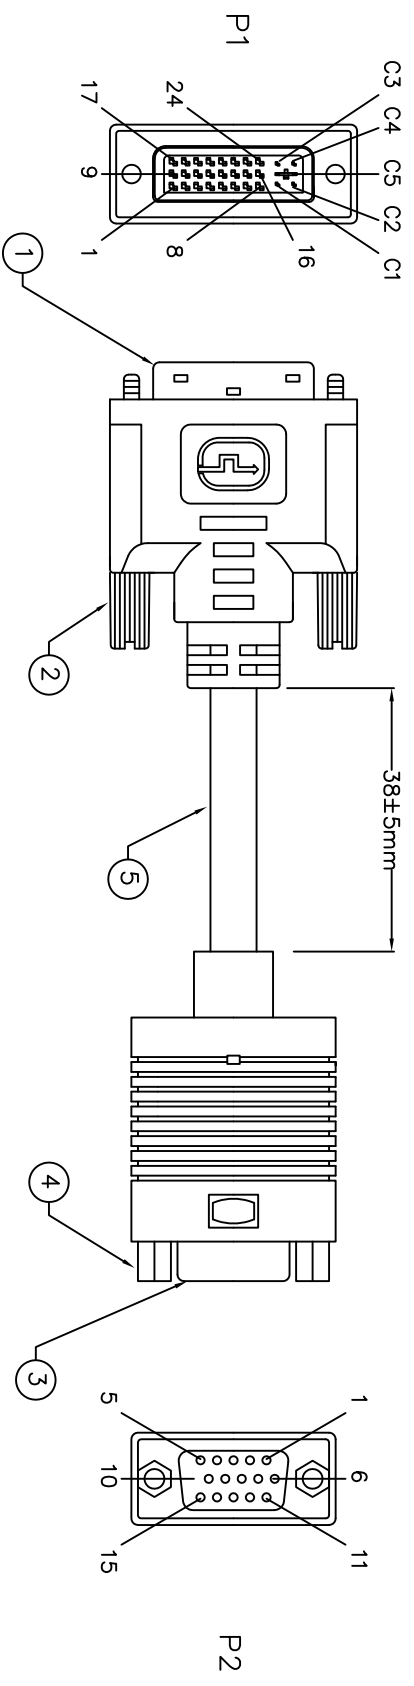

CABLE: UL 20276
CONDUCTOR: (30AWG*3COAX)+28AWG*1PAIR+28AWG*5C+AL/MYLAR+BRAID(85%)
JACKET: PVC, OD: $\phi 7.3 \pm 0.2$ mm
COLOR: BLACK

PIN ASSIGNMENT	
P1	P2
C1 (30AWG)	1 (RED), COAX
C2 (30AWG)	2 (GREEN), COAX
C3 (30AWG)	3 (BLUE), COAX
C4 (28AWG)	13 (BROWN)
C5 (SHIELD)	6+7+8 (R.G.B) COAX
6 (28AWG, 1P)	15 (ORANGE)
7 (28AWG, 1P)	12 (YELLOW)
8 (28AWG)	14 (RED)
14+16 (28AWG)	9 (BLACK)
15 (28AWG)	5+10 (GREEN)
SHELL	SHELL (BRAID)

NOTE	DESCRIPTION
1	DVI/M/24+5PIN (MALE) CONNECTOR (194-1029-0300221C)
2	#4-40 UNC SCREW * 2PCS
3	UL 20276 (30AWG*3C)+28AWG*1P+28AWG*5C+A+B CABLE
4	HD 15PIN (FEMALE) CONNECTOR
5	SCREW NUTS * 2PCS

		APPROVALS		DATE	
DRAWN Grace Chui	CHECKED James Tang	2011.08.02	2011.08.02	DVI/M/24+5P to HD 15P(F), 38mm	
DIMENSION IN BRACKET [XX] ARE INCHES TOLERANCES ARE XX		DIMENSION IN BRACKET [XX] ARE INCHES TOLERANCES ARE XX		UL 20276 $\phi 7.3$ mm CABLE	
APPROVAL Simon Huang		APPROVAL 2011.08.02		SIZE C	SCALE : XX : XX
DO NOT SCALE DRAWING		ID NO.		DRAWING NO. MD-5194016	REV. A
		SHEET 1 OF 1			