



CUSTOMER DRAWING

REVISIONS	DESCRIPTION	DATE	APPROVED
LTR			

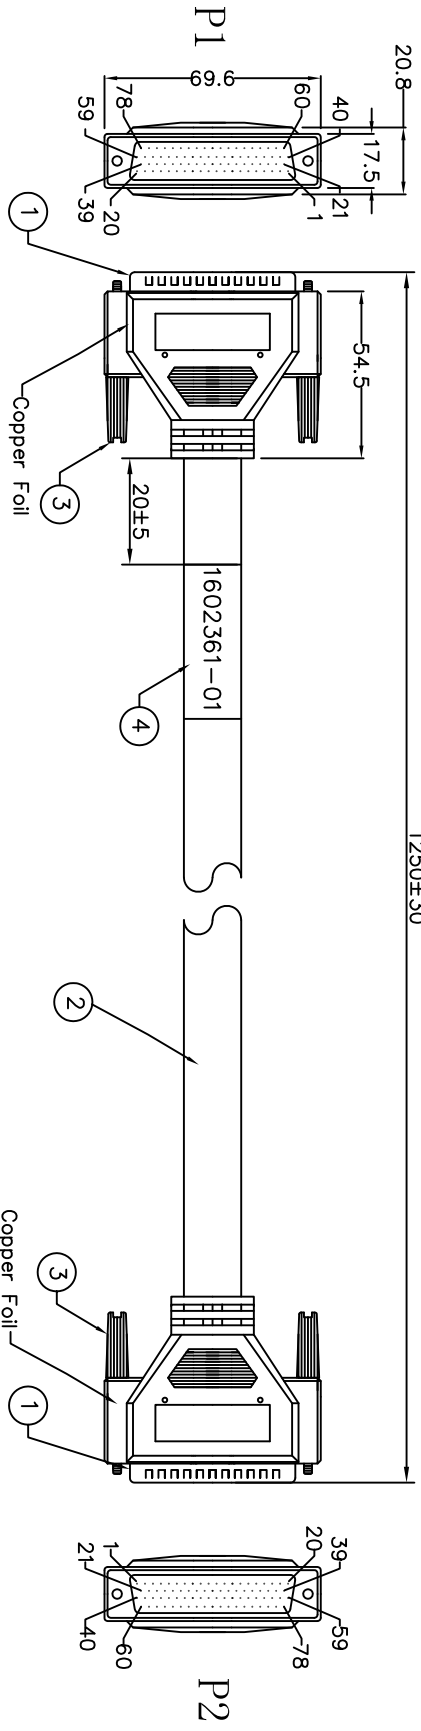

PIN ASSIGNMENT

P1	P2	P1	P2	P1	P2	P1	P2	P1	P2	P1	P2	P1	P2	P1	P2
1	1	17	17	33	33	49	49	65	65	65	65	65	65		
2	2	18	18	34	34	50	50	66	66	66	66	66	66		
3	3	19	19	35	35	51	51	67	67	67	67	67	67		
4	4	20	20	36	36	52	52	68	68	68	68	68	68		
5	5	21	21	37	37	53	53	69	69	69	69	69	69		
6	6	22	22	38	38	54	54	70	70	70	70	70	70		
7	7	23	23	39	39	55	55	71	71	71	71	71	71		
8	8	24	24	40	40	56	56	72	72	72	72	72	72		
9	9	25	25	41	41	57	57	73	73	73	73	73	73		
10	10	26	26	42	42	58	58	74	74	74	74	74	74		
11	11	27	27	43	43	59	59	75	75	75	75	75	75		
12	12	28	28	44	44	60	60	76	76	76	76	76	76		
13	13	29	29	45	45	61	61	77	77	77	77	77	77		
14	14	30	30	46	46	62	62	78	78	78	78	78	78		
15	15	31	31	47	47	63	63								
16	16	32	32	48	48	64	64								

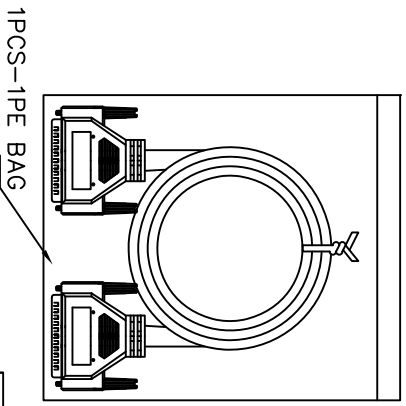

NOTE	DESCRIPTION
1	HD 78PIN (MALE) CONNECTOR*2
2	UL 20276 [(28AWG*1P)*39P+AL+D+B] CABLE
3	SCREW 4--40# * 4PCS
4	LABLE *1PCS

CABLE: UL 20276
CONDUCTOR: [(28AWG*1PAIR)*39P+AL/M/Y+DRAIN WIRE +BRAID(16*10/0.10T) Rate: 85%]
JACKET: PVC , OD: Ø10.5±0.2mm
COLOR: BLACK

NOTE:
1. INNER MOLDING MUST SOLDERING BY COPPER FOIL 360° WITH BRAID.
2. 100% TEST OPEN SHORT & MIS-WIRE
3. INSULATION RESISTANCE: 5M OHM
4. HIPOT TEST: DC 300V, 0.01/S.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: XXXXX	APPROVALS	DATE	REV.
DIMENSIONS TOLERANCE	DRAWN	2014.11.26	A
	CHECKED		
	TERRY.HO		
	APPROVAL		
.X	±0.5		
X	±1		
XX	±10		
XXX	±50		

ROHS COMPLIANT

A

B

C

D

A

B

C

D

4

3

2

1