


PART NO. FT-C000-D990147
 CUST NO.

CUSTOMER DRAWING

REV. NO.	DESCRIPTION	DATE	APPROVED
1			

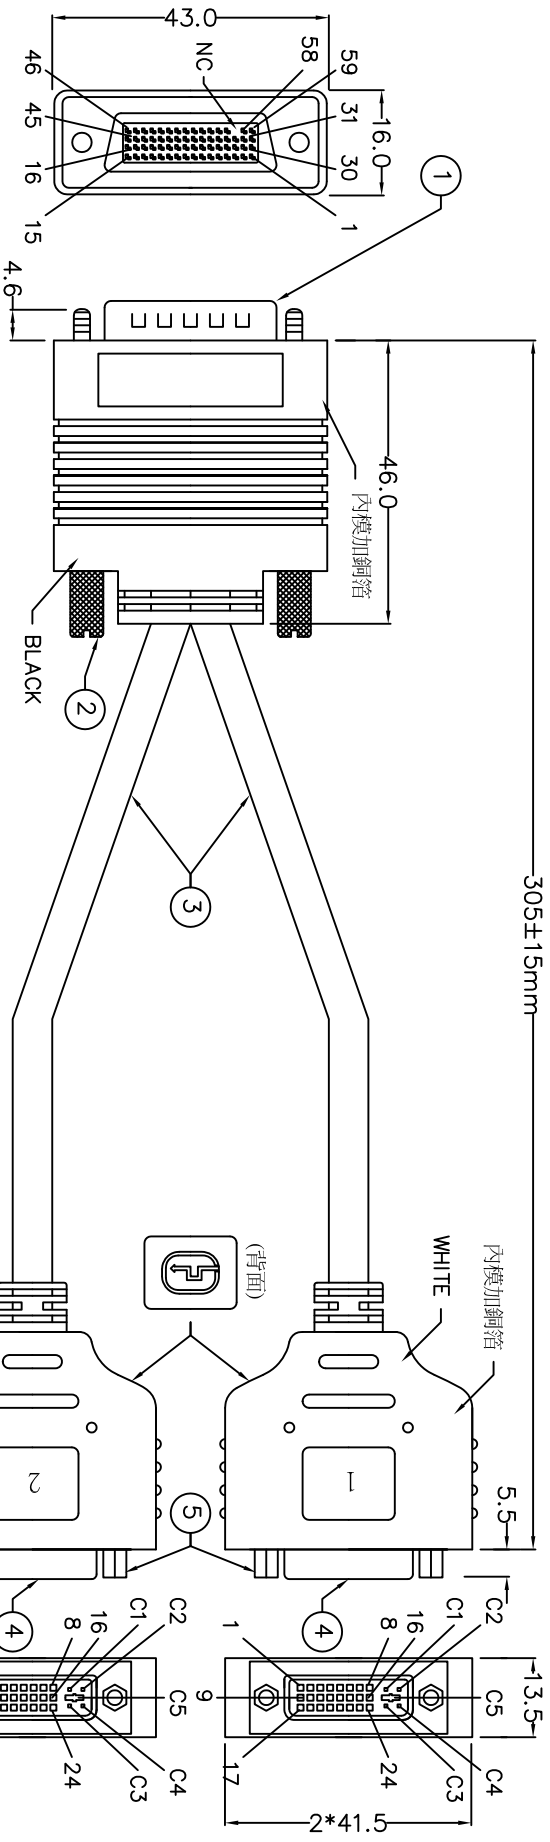

ELECTRICAL CHARACTER:
 a. 100% OPEN & SHORT TESTING:
 b. WITHSTANDING VOLTAGE: DC 300V;
 c. INSULATION RESISTANCE: 10M ohm;
 d. CONDUCEIVE RESISTANCE: 2 ohm;

NOTE	DESCRIPTION
1	DMS 59PIN (MALE) CONNECTOR (內模加銅箔)
2	#4-40 UNC,NICKEL PLTAEED * 2PCS
3	CABLE: UL 20276 CONDUCTOR: [(30AWG*1P+D+FAM,100±10 OHM)*4C +(30AWG*1COAX+SPIRAL SHIELD,75%5P5 OHM)*3C +30AWG*1P+30AWG*5C]+AL/MYLLAR+BRAID (95%) JACKET: PVC , OD: φ7.0±0.2mm COLOR: BLACK
4	DVI/F/24+5PIN (FEMALE) CONNECTOR (內模加銅箔) * 2PCS
5	SCREW NUTS * 4PCS
6	條碼標籤 (30*60mm)

APPROVALS	DATE	REV.
DRAWN Terry Ho	2012.03.22	A
CHECKED Simon Tang	2012.03.22	
APPROVAL Shan Huang	2012.03.22	



DMS 59P(M) to DVI/F/24+5P F/F
 305mm*2PCS CABLE

SCALE : XX : XX
 DRAWING NO.
 SHEET 1 OF 1

4 3 2 1 4 3 2 1