


PART NO.	FT-C000-S102798
CUST NO.	

CUSTOMER DRAWING

REV. NO.	DESCRIPTION	DATE	APPROVED
1			

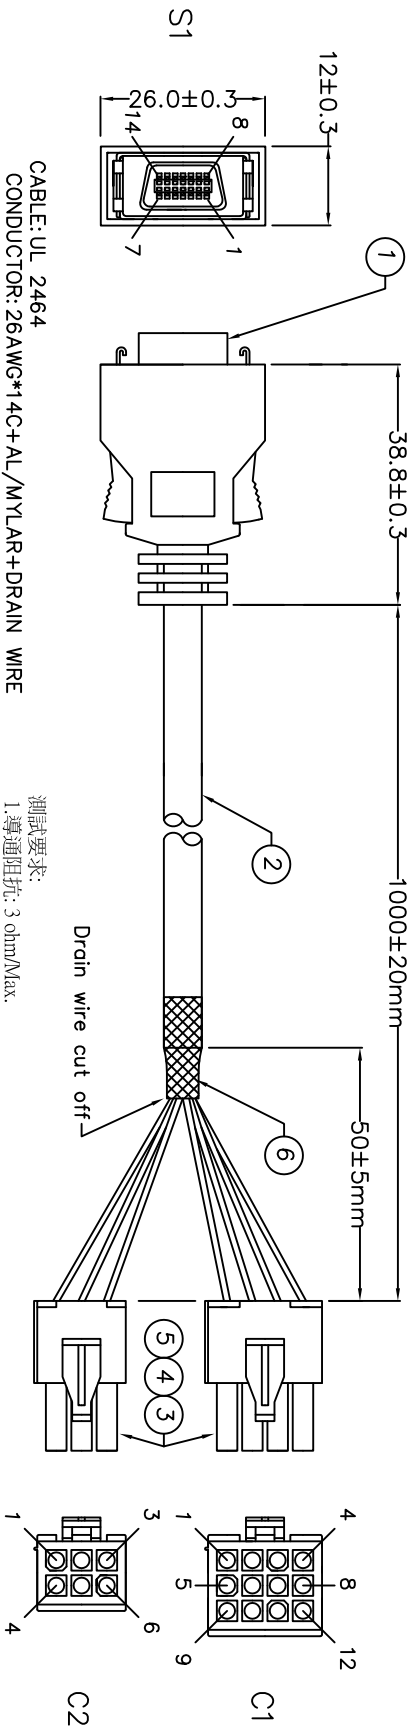

CABLE: UL 2464
 CONDUCTOR: 26AWG*14C+AL/MYLAR+DRAIN WIRE
 JACKET: PVC, OD: $\phi 5.8 \pm 0.2$ mm
 COLOR: BLACK

測試要求:
 1. 導通阻抗: 3 ohm/Max.
 2. 絕緣測試: 2M ohm/Min.
 3. 耐壓測試: DC 300V/0.01s.

PIN ASSIGNMENT

S1	C1	C2
1 (26AWG)	6	
2 (26AWG)	12	
3 (26AWG)	5	
4 (26AWG)	9	
5 (26AWG)	4	
6 (26AWG)	8	
7 (26AWG)	2	
8 (26AWG)	5	
9 (26AWG)	1	
10 (26AWG)	4	
11 (26AWG)	6	
12 (26AWG)	3	
13 (26AWG)	3	
14 (26AWG)	2	
SHELL (DRAIN)	NC	NC

NOTE	DESCRIPTION
1	SCSI 14PIN (MALE) CONNECTOR
2	UL 2464 26AWG*14C+A+D CABLE
3	P/N: 6612-12M1, 4.14mm 3*4P HOUSING
4	P/N: 6612-06M1, 4.14mm 2*3P HOUSING
5	P/N: 7004T, 4.14mm TERMINAL * 14PCS
6	$\phi 7.0 * 20.0$ mm SHRINK TUBE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	
ANGULAR	TOLERANCE: XXXXX
DIMENSIONS	TOLERANCE
.X	± 0.5
X.X	± 1
XX.X	± 10
XXX.	± 50

APPROVALS	DATE
DRAWN: TERRY.HO	2013.09.27
CHECKED: TERRY.HO	2013.09.27
APPROVAL: Bryan. Ho	2013.09.27



SCSI 14P(M) to 6612-12M1/06M1, 1.0	
M UL 2464 26AWG*14C+AD CABLE	
SIZE: C	SCALE: XX
ID/NO.	REV: A
	DRAWING NO. FT-C292-438
	SHEET 1 OF 1