


PART NO. FT-C001-S98005  
 CUST NO. GTC-32000-105800-RS

# CUSTOMER DRAWING

REV. NO.	DESCRIPTION	DATE	APPROVED
1			

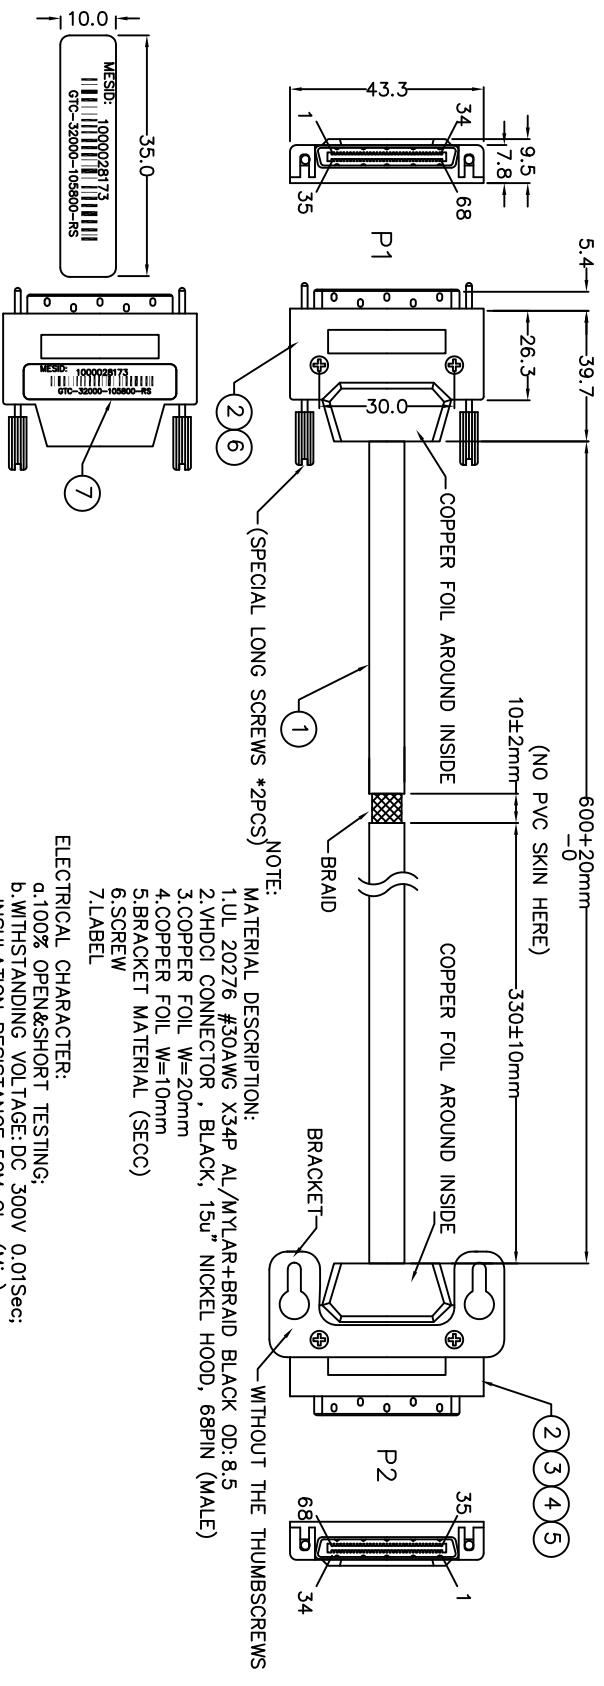

### PIN ASSIGNMENT


Pair	P1	P2	Pair	P1	P2	Pair	P1	P2	Pair	P1	P2	Pair	P1	P2	Pair	P1	P2
1	1	1	8	8	8	15	15	15	22	22	22	29	29	29	36	36	36
2	2	2	9	9	9	16	16	16	23	23	23	30	30	30	37	37	37
3	3	3	10	10	10	17	17	17	24	24	24	31	31	31	38	38	38
4	4	4	11	11	11	18	18	18	25	25	25	32	32	32	39	39	39
5	5	5	12	12	12	19	19	19	26	26	26	33	33	33	40	40	40
6	6	6	13	13	13	20	20	20	27	27	27	34	34	34	41	41	41
7	7	7	14	14	14	21	21	21	28	28	28	35	35	35	42	42	42
			14	14	14	21	21	21	28	28	28	35	35	35	42	42	42

NOTE:  
 MATERIAL DESCRIPTION:  
 1. UL 20276 #30AWG X34P AL/MYLAR+BRAID BLACK OD:8.5  
 2. VHDCI CONNECTOR, BLACK, 15U" NICKEL HOOD, 68PIN (MALE)  
 3. COPPER FOIL W=20mm  
 4. COPPER FOIL W=10mm  
 5. BRACKET MATERIAL (SECC)  
 6. SCREW  
 7. LABEL

WITHOUT THE THUMBSCREWS

(SPECIAL LONG SCREWS \*2PCS)

ELECTRICAL CHARACTER:  
 a. 100% OPEN&SHORT TESTING;  
 b. WITHSTANDING VOLTAGE: DC 300V 0.01Sec;  
 c. INSULATION RESISTANCE: 50M Ohm (Min);  
 d. CONDUCTIVE RESISTANCE: 2 Ohm(Max);  
 PRODUCE MUST BE CONFORM TO ROHS SPECIFICATION.

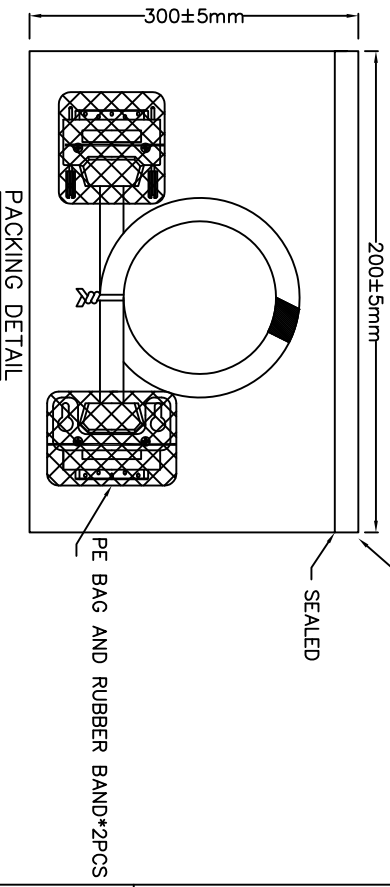

NO.	PART NO.	DESCRIPTION	QTY	UNIT
1	CABLE	UL 20276 30AWG*34+AL/MY+B CABLE (COPARTNER)	620	MM
2	CONNECTOR	PITCH 0.8mm OFFSET VHDCI CEN 68PIN (MALE) PIN: GOLD PLATED 15U" (FREEPORT)	2	PCS
3	SCREW	Ø5.0*55.0mm THUMBSCREW * 2PCS	2	PCS
4	COOPER FOIL	COPPER * 2PCS	2	PCS
5	BRACKET	BRACKET	1	PCS



APPROVALS	DATE
DRAWN: Chunhua Yan	2009.04.02
CHECKED: Hallong Zhang	2009.04.02
APPROVAL: Shan, Huang	2009.04.02

SIZE: CEN 68P M/M, 600mm UL 20276	SCALE: XX:XX	DRAWING NO. FT-C242-65	REV. B
ID NO.		SHEET 1 OF 1	