


CUSTOMER DRAWING


| REVISIONS | | DATE | APPROVED |
|-----------|-------------|------|----------|
| LTR | DESCRIPTION | | |

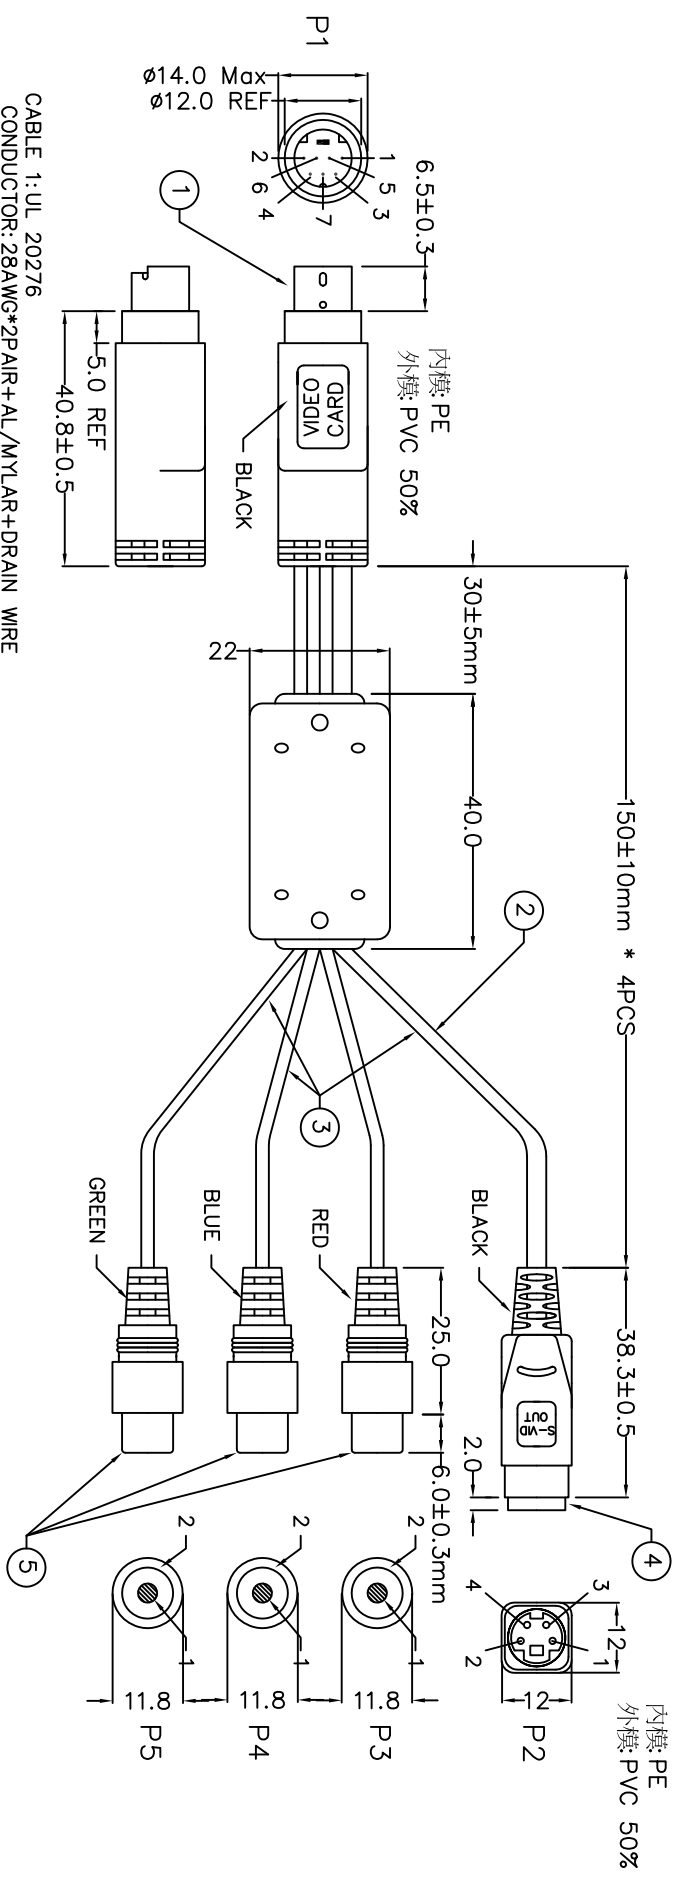

CABLE 1: UL 20276
 CONDUCTOR: 28AWG*2P AIR+AL/MYLAR+DRAIN WIRE
 JACKET: PVC, OD: $\phi 4.0 \pm 0.1$ mm
 COLOR: BLACK
 CABLE 2: UL 1354
 CONDUCTOR: 28AWG*1C+SPIRAL SHIELD
 JACKET: PVC, OD: $\phi 2.8 \pm 0.1$ mm
 COLOR: BLACK

PIN ASSIGNMENT

| P1 | P2 | P3 | P4 | P5 | NOTE | DESCRIPTION |
|--------------|-------|----|----|----|------|---|
| 1 (SHIELD) | 1 | | | 2 | 1 | 7PIN MINI DIN (MALE) CONNECTOR |
| 2 (SHIELD) | 2 | | | 2 | 2 | CABLE 1 * 1PCS |
| 3 (28AWG) | 3 | | | 1 | 3 | CABLE 2 * 3PCS |
| 4 (28AWG) | 4 | | | 1 | 4 | 4PIN MINI DIN (FEMALE) CONNECTOR |
| 5 (28AWG) | | | | 1 | 5 | RCA JACK (NICKEL PLATED) * 3PCS |
| 6 (SHIELD) | | | | 2 | 6 | CORE: $\phi 17.5 \times 9.5 \times 28.5$ mm |
| SHELL(DRAIN) | SHELL | | | | | |

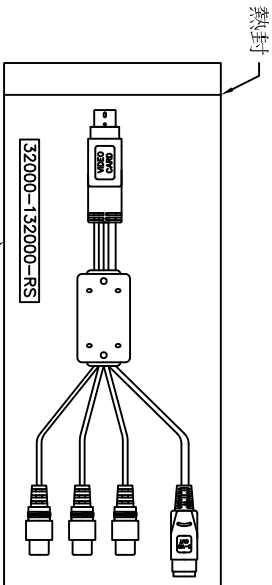

| | | | | | | |
|--|--|-----------|--|------------|--|---|
| DIMENSION ARE MILLIMETERS TOLERANCES ARE: | | APPROVALS | | DATE | | |
| DECIMALS ANGLES | | DRAWN | | 2009.05.14 | | |
| .XX ± 0.20 | | YUPingLan | | 2009.05.14 | | |
| DIMENSION IN BRACKET (XXX) ARE INCHES TOLERANCES ARE: | | INSPECTED | | 2009.05.14 | | Futronic Technology |
| .XX ± 0.20 | | Zalien | | 2009.05.14 | | |
| DECIMALS ANGLES .XX ± 0.2 | | CHECKED | | 2009.05.14 | | |
| DO NOT SCALE DRAWING | | Bryen | | | | SIZE SCALE: FT - C292 - 83 FORM NO. SHEET 1 OF 1 |

A

B

C

D

4

3

2

1

A

B

C

D

4

3

2

1