


CUSTOMER DRAWING

REV	DESCRIPTION	DATE	APPROVED
1			

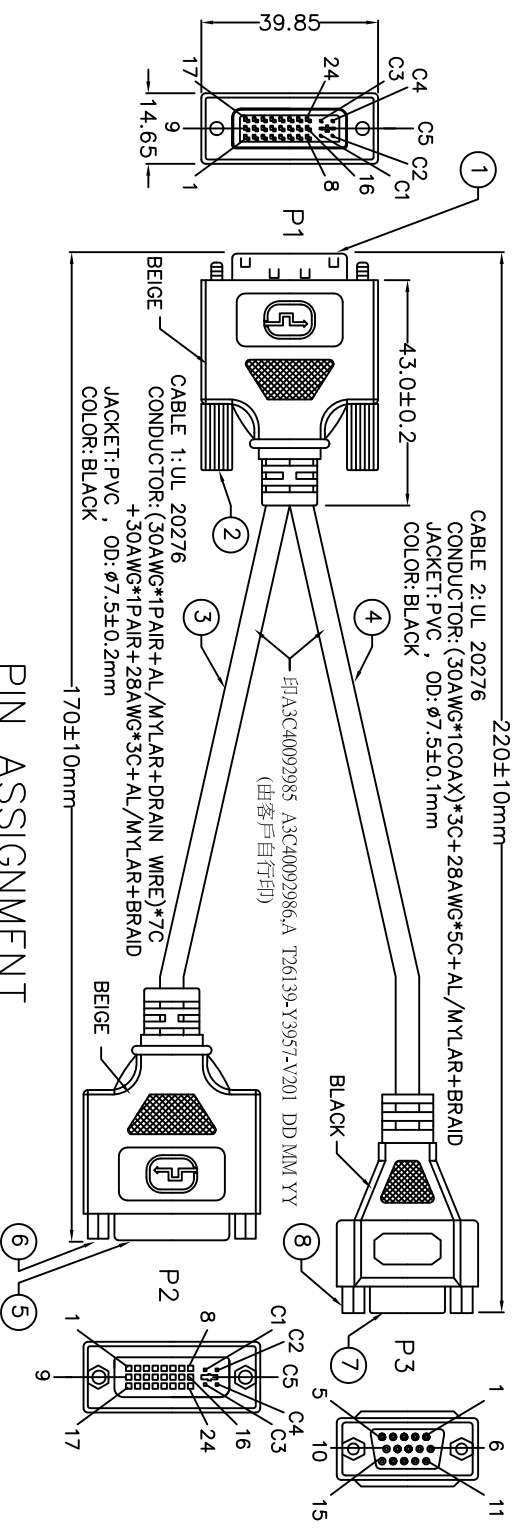

PIN ASSIGNMENT

WIRE	COLOR	P1	P2	WIRE	COLOR	P1	P2	WIRE	COLOR	P1	P2	P3	NOTE	DESCRIPTION
1	WHITE	1 (30AWG)	1	SHIELD	19 (DRAIN)	19	13	BLACK	8 (28AWG)	14	14	1	1	DV/M/24+5P UNCSW * 2PCS
2	BLUE	2 (30AWG)	2	LIGHT BLUE	20 (30AWG)	20	14	BROWN	14 (28AWG)	9	2	2	2	#4-40 UNC SWER * 2PCS
3	SHIELD	3 (DRAIN)	3	VIOLET	21 (30AWG)	21	15	YELLOW	15 (28AWG)	5	3	3	3	CABLE 1
4	SHIELD	3 (DRAIN)	3	SHIELD	22 (DRAIN)	22	15	ORANGE	15 (28AWG)	10	4	4	4	CABLE 2
5	GRAY	4 (30AWG)	4	RED	23 (30AWG)	23	16	RED	16 (28AWG)	13	5	5	5	DV/F/24+5P UNCSW * 2PCS
6	BLACK	5 (30AWG)	5	WHITE	24 (30AWG)	24	17	RED	17 (28AWG)	1	6	6	6	#4-40 SCREW NUTS * 2PCS
7	WHITE	9 (30AWG)	9	ORANGE	6 (30AWG)	6	18	GREEN	18 (28AWG)	2	7	7	7	HD 15PIN (FEMALE) CONNECTOR
8	BROWN	10 (30AWG)	10	YELLOW	7 (30AWG)	7	19	BLUE	19 (28AWG)	3	8	8	8	SCREW NUTS * 2PCS
9	SHIELD	11 (DRAIN)	11	WHITE	14 (28AWG)	14	20	SHIELD	20 (30AWG)	19	20	20	20	
10	SHIELD	11 (DRAIN)	11	RED	15 (28AWG)	15		SHIELD	15 (28AWG)	15				
11	SHIELD	11 (DRAIN)	11	PURPLE	16 (28AWG)	16		SHIELD	16 (28AWG)	16				
12	PINK	12 (30AWG)	12	BRAID	SHELL+CS	SHELL								
13	ORANGE	13 (30AWG)	13											
14	WHITE	17 (30AWG)	17											
15	GREEN	18 (30AWG)	18											
16	SHIELD	19 (DRAIN)	19											

ROHS COMPLIANT

INFORMATION AND TOLERANCES DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLES X.XX ±0.05 10.00 ±0.20 X.XX ±0.10 10.00 ±0.30 DIMENSION IN BRACKET [X.XX] ARE INCHES TOLERANCES ARE: DECIMALS ANGLES X.XX ±0.005 10.00 ±0.125	APPROVALS DRAWN: Chunfuhua Yan CHECKED: Heilong Zhang APPROVAL: Shan Huang	DATE 2009.01.08 2009.01.08		SIZE: DV/M/24+5P to DV/F/24+5P/HD SCALE: 15P(F) CABLE DRAWING NO. FT-C242-244 SHEET 1 OF 1
---	---	----------------------------------	--	---