PART NO.	FT-C020-S100008
CUST NO.	

CUSTOMER DRAWING

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

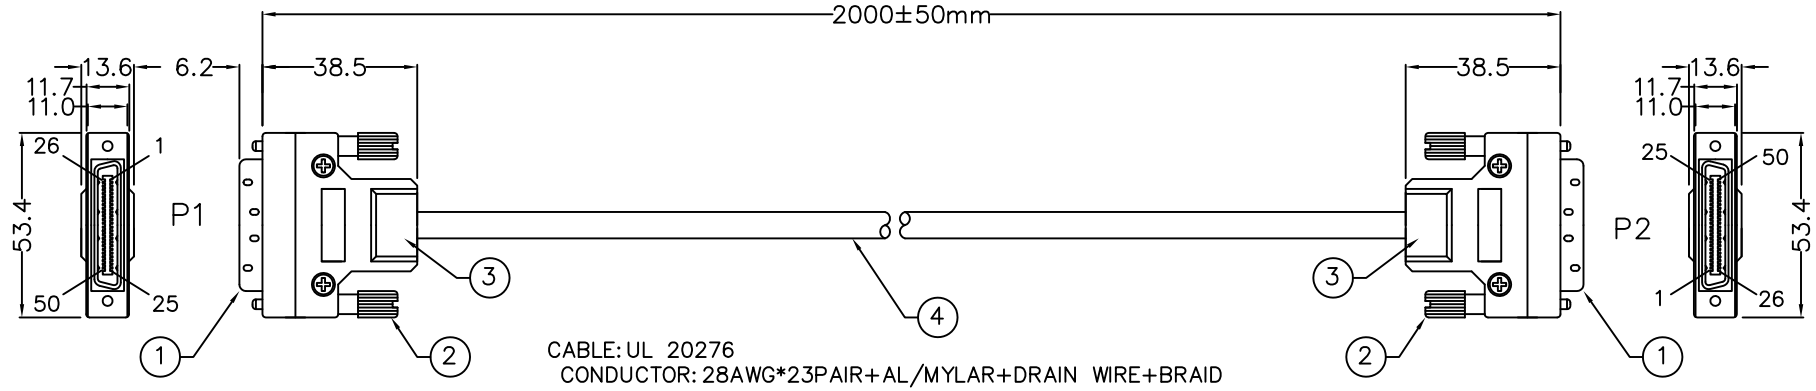

CABLE: UL 20276
CONDUCTOR: 28AWG*23PAIR+AL/MYLAR+DRAIN WIRE+BRAID
JACKET: PVC , OD: ø6.5±0.2mm
COLOR: BLACK

TEST:
1.100% OPEN & SHORT TEST.
2.CONDUCTANCE RESISTANCE: 1 ohm (MAX).
3.INSULATION RESISTANCE: 20M ohm (MIN).
4.HI-POT TEST: 300V DC/0.01S.

WIRING DIAGRAM

P1	P2	P1	P2	P1	P2
2 (28AWG)	2	31 (28AWG)	31	40 (28AWG)	40
6 (28AWG)	6	33 (28AWG)	33	41 (28AWG)	41
7 (28AWG)	7	16 (28AWG)	16	42 (28AWG)	42
10 (28AWG)	10	17 (28AWG)	17	43 (28AWG)	43
8 (28AWG)	8	18 (28AWG)	18	44 (28AWG)	44
9 (28AWG)	9	19 (28AWG)	19	45 (28AWG)	45
14 (28AWG)	14	20 (28AWG)	20	46 (28AWG)	46
15 (28AWG)	15	21 (28AWG)	21	47 (28AWG)	47
13 (28AWG)	13	22 (28AWG)	22	48 (28AWG)	48
30 (28AWG)	30	23 (28AWG)	23	49 (28AWG)	49
11 (28AWG)	11	24 (28AWG)	24	1+25+26+50 +SHELL (DRAIN+BRAID)	1+25+26+50 +SHELL
12 (28AWG)	12	27 (28AWG)	27		
35 (28AWG)	35	28 (28AWG)	28		
37 (28AWG)	37	29 (28AWG)	29		
34 (28AWG)	34	32 (28AWG)	32		
3 (28AWG)	3	36 (28AWG)	36		
4 (28AWG)	4	38 (28AWG)	38		
5 (28AWG)	5	39 (28AWG)	39		

NOTE	DESCRIPTION
1	SCSI REBBON TYPE 50PIN (MALE) * 2PCS
2	THUMBSCREW * 4PCS
3	內加銅箔 * 2PCS
4	UL 20276 28AWG*23P+A+B+D CABLE

DIMENSION ARE MILLIMETERS
TOLERANCES ARE :
DECIMALS .X ± 0.50 .XX ± 0.30 ANGLES ± 3°
DIMENSION IN BRACKET [X.XX] ARE INCHES TOLERANCES ARE :
DECIMALS .XX ±0.2 .XXX ANGLES ± 3°
DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	Grace. Chui	2011.03.02
CHECKED	James Tang	2011.03.02
APPROVAL	Simon.Huang	2011.03.02

Futronic Technology

SCSI 50P M/M , 2.0M UL 20276
28AWG*23P+AED CABLE

SIZE	SCALE :	DRAWING NO.	REV.
C	XX : XX	FT – C292 – 250	A
ID NO.		SHEET 1 OF 1	