



PART NO. FT-C025-U100133  
CUST NO.

# CUSTOMER DRAWING


REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

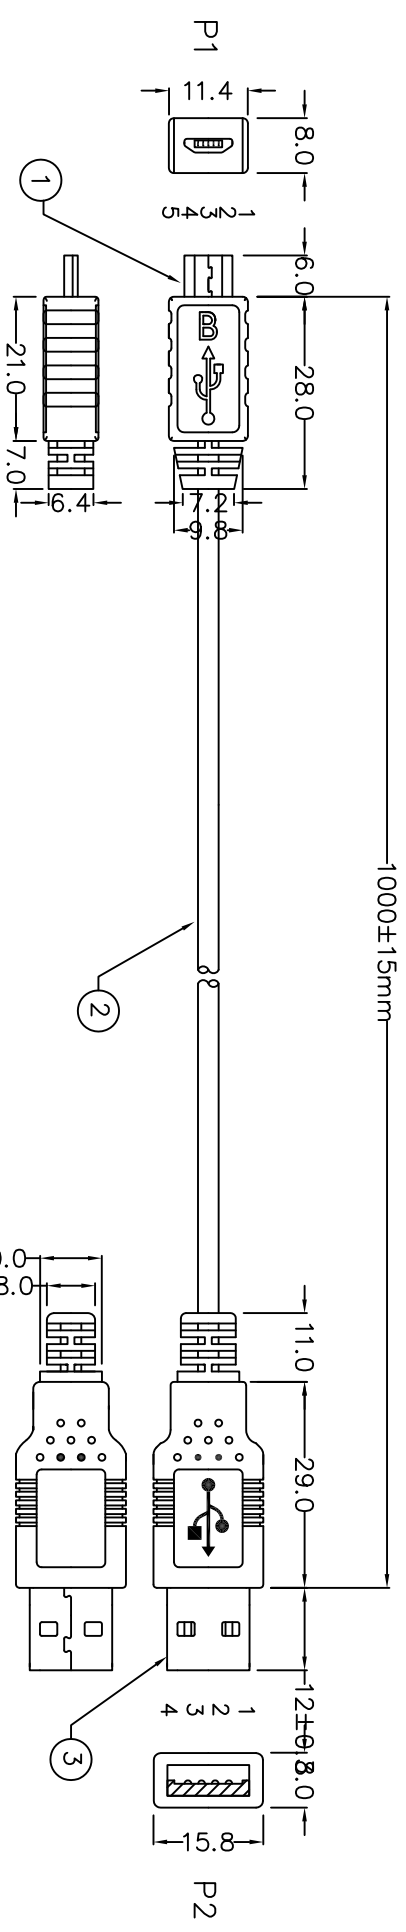

CABLE: UL 2725  
CONDUCTOR: (28AWG\*1PAIR)+28AWG\*2C+AL/MYLAR+DRAIN WIRE+BRAID(16\*3/0.12)  
JACKET: PVC , OD:  $\phi 3.5 \pm 0.1$ mm  
COLOR: BLACK

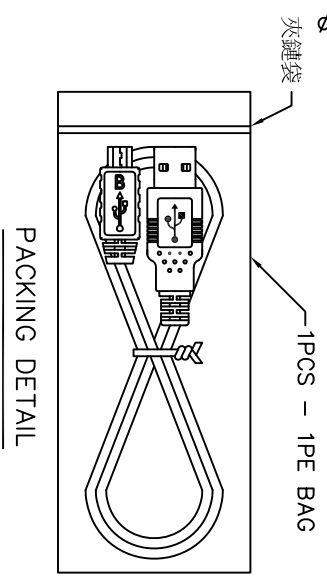

### WIRING DIAGRAM

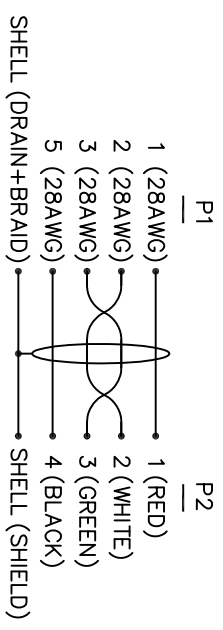

NOTE	DESCRIPTION
1	MICRO B-TYPE SPIN (MALE) 180°, PIN: GOLD FLASH
2	UL 2725 (28AWG*1P)+28AWG*2C+AEB CABLE
3	USB A-TYPE (MALE), PIN: GOLED FLASH

		<b>MICRO B-TYPE 5P(M) to USB A-TYPE (M), 1.0M UL 2725 <math>\phi 3.5</math>mm CABLE</b>	
APPROVALS DRAWN: Chunhua Yan CHECKED: Terry, Ho APPROVAL: Bryan, Ho	DATE 2011.12.12 2011.12.12	SIZE C	SCALE : XX : XX
ID NO.	DRAWING NO. FT-C292-302	REV. A	SHEET 1 OF 1

4 3 2 1 4 3 2 1