


PART NO. FT-C055-M108007
 CUST NO. 26300000000179

CUSTOMER DRAWING

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

RoHS

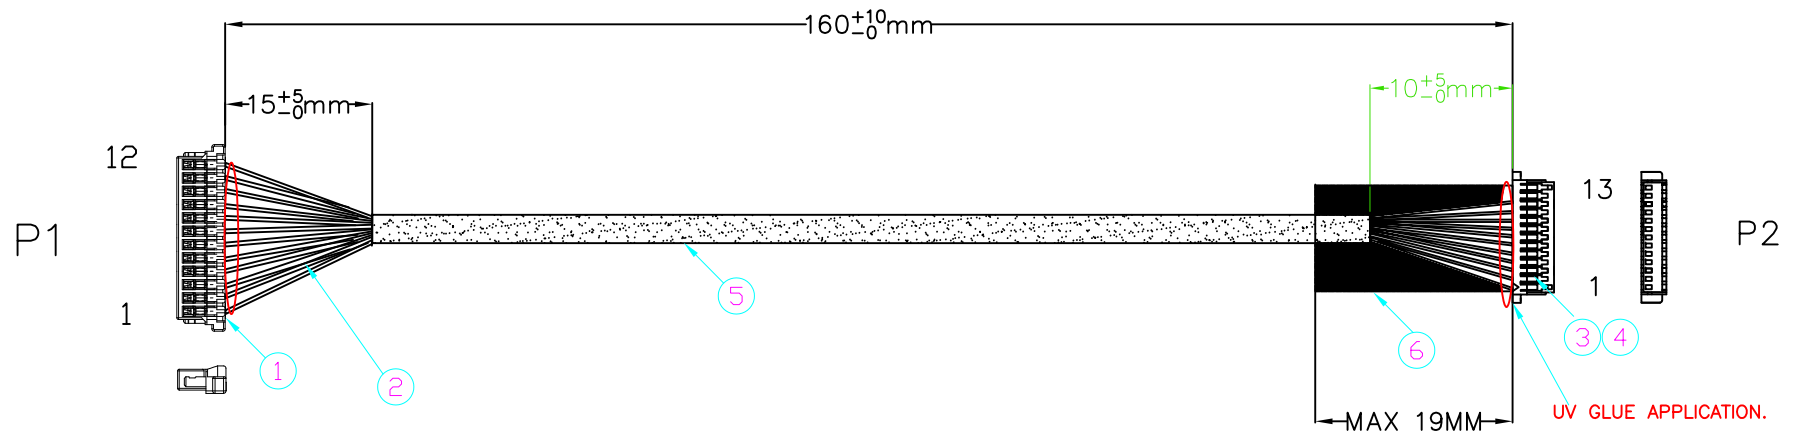


WIRING DIAGRAM

P1		P2
1 (32AWG)	—	1 (32AWG)
2 (32AWG)	—	2 (32AWG)
3 (32AWG)	—	3 (32AWG)
4 (32AWG)	—	4 (32AWG)
5 (32AWG)	—	5 (32AWG)
6 (32AWG)	—	6 (32AWG)
7 (32AWG)	—	7 (32AWG)
8 (32AWG)	—	8 (32AWG)
9 (32AWG)	—	9 (32AWG)
10 (32AWG)	—	10 (32AWG)
11 (32AWG)	—	11 (32AWG)
12 (32AWG)	—	12 (32AWG)

X13 (N.C)

NOTE:

- 1.100% TEST OPEN SHORT & MIS-WIRE
- 2.CONDUCTION RESISTANCE: 3 Ohm (MAX)
- 3.INSULATION RESISTANCE: 5M Ohm (MIN)
- 4.HIPOT TEST:DC 300V, 0.01/S.
- 5.APPLY UL LABEL ON THE CARTON.



WARNING !!
 This wiring must be produced and packaged exclusively by a vendor UL Certified
 Under ZPFW2 ZPFW8
 Product Category

NOTE	DESCRIPTION
1	JST P/N:12SUR-32S PITCH:0.8*12PIN HOUSING IDC TYPE.
2	UL10064 32AWG WIRE
3	JST P/N: SHR-13V-S-B , 1.0mm*13P HOUSING
4	JST P/N: SSH-003T-P0.2 , 1.0mm TERMINAL * 12PCS
5	HEAT SHRINK TUBE
6	W=19mm ACETATE TAPE.

UNLESS OTHERWISE SPECIFIDE DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: XXXXX		APPROVALS	DATE
DIMENSIONS	TOLERANCE	DRAWN PETER.YEH	2019.01.07
.X	±0.5	CHECKED SANDY.CHEN	2019.01.07
X.	±1	APPROVAL BRYAN.HO	2019.01.07
XX.	±10		
XXX.	±50		

Futronic Technology

CAB CIS UP ST127_CB006 UL

SIZE	SCALE :	DRAWING NO.	REV.
C	XX : XX	FT - C292 - 683	A
ID NO.	SHEET 1 OF 1		