


PART NO. FT-C015-U113965  
 CUST. NO.

# CUSTOMER DRAWING

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

**RoHS**

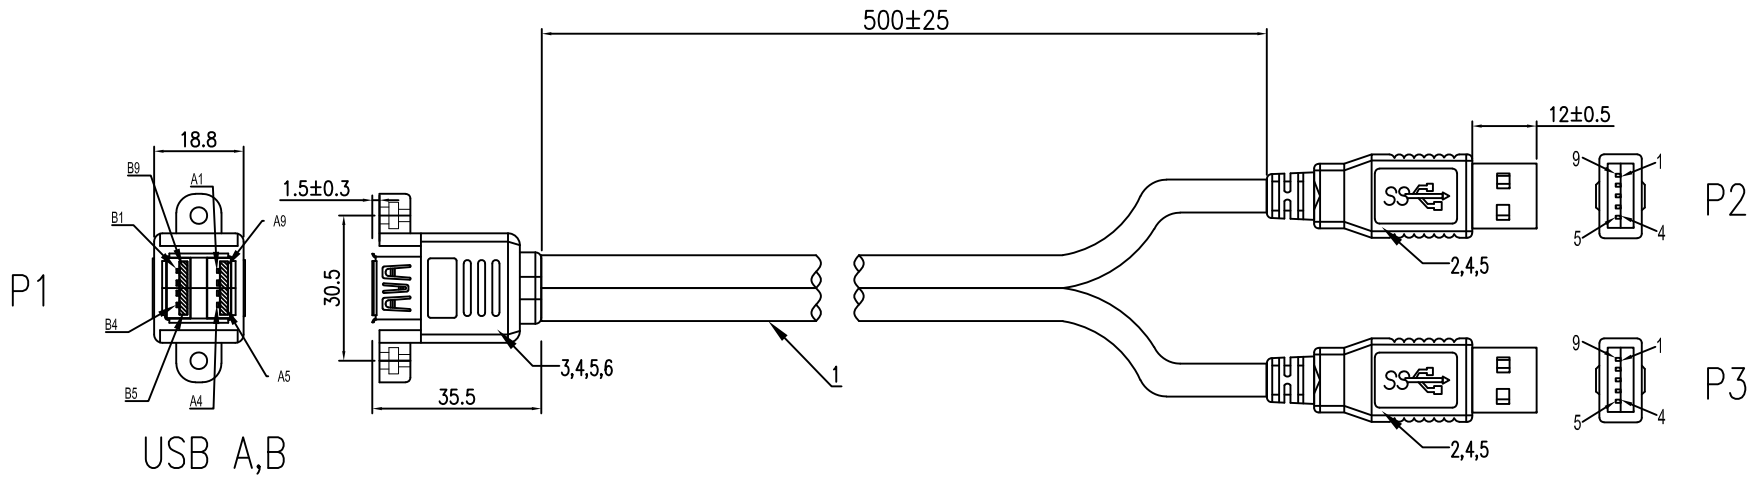

**PIN ASSIGNMENT:**

USB A		P2	USB B		P3
A1	RED	1	B1	RED	1
A2	WHITE	2	B2	WHITE	2
A3	XX GREEN	3	B3	XX GREEN	3
A4	BLACK	4	B4	BLACK	4
A5	BLUE	5	B5	BLUE	5
A6	YELLOW	6	B6	YELLOW	6
A7	DRAIN	7	B7	DRAIN	7
A8	PLUPRE	8	B8	PLUPRE	8
A9	ORANGE	9	B9	ORANGE	9
SHELL		SHELL	SHELL		SHELL

6	M3 SCREW NUT *2	
5	OVER-MOLDING: PVC 45P, BLACK, ROHS	
4	INNER MOLDING: LD-PE	
3	USB3.0 A-TYPE FEMALE *2 CONNECTOR, PLATING:G/F ,BODY: BLUE COLOR, NICKEL SHELL, ROHS	1
2	USB3.0 A-TYPE MALE PLUG CONNECTOR, PLATING:G/F ,BODY: BLUE COLOR, NICKEL SHELL, ROHS	2
1	UL20276(30#x1P+DAM)x2+30#x1P+26#x2C+F+AEB(16*6/0.12AM) OD5.5mm BLACK, IBC-003 USB3.0 HALF-MATT ROHS	2
ITEM	DESCRIPTION	QTY

**NOTE:**

- 100% TEST OPEN SHORT & MIS-WIRE
- CONDUCTION RESISTANCE: 2 Ohm (MAX)
- INSULATION RESISTANCE: 5M Ohm (MIN)
- HIPOT TEST:DC 300V, 0.01/S.

UNLESS OTHERWISE SPECIFIDE DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: XXXXX		APPROVALS	DATE	
DRAWN		PETER.YEH	2024.10.15	
CHECKED		SANDY.CHEN	2024.10.15	
APPROVAL		BRYAN.HO	2024.10.15	
DIMENSIONS		TOLERANCE		USB3.0 A/Fx2 TO USB3.0 A/Mx2 CABLE L=0.5M, PANEL MOUNTED TYPE.
.X		±0.5		
X.		±1		
XX.		±10		
XXX.		±50		SIZE: C SCALE: xx : xx DRAWING NO.: KY-U324-1007 REV.: A
ID NO.		1		SHEET 1 OF 1